

Tableau 1

Puissance moteur 4 pôles B5			Demi accouplement côté moteur Dimensions en millimètre						Roue élastique				Demi accouplement côté pompe																													
Kw	Taille	HP	Référence	A	C	G	D	CH	T	Référence	I	Ø	Ød maxi	Référence	Dimensions en millimètre				Valeurs possibles de E (en millimètre)																							
0,12 0,18	63	0,16 0,25	ND48A	48	30	19	11	4	12,8	R42	16	19	14	NS48P**	48	30	-	15	17																							
0,25 0,37	71	0,35 0,5	ND48B		30	29	14	5	16,3																																	
0,55 0,75	80	0,75 1	ND48C		38	54	19	6	21,8																																	
1,1 1,5	90	1,5 2	ND48D		38	54	24	8	27,3																																	
0,55 0,75	80	0,75 1	ND65A	65	42	47,5	19	6	21,8	R62	18	29	22	NS65P**	65	34	16	20	21,5	20																						
1,1 1,5	90	1,5 2	ND65B		48	47,5	24	8	27,3												NS65Q**	65	48	15	22,2	31,5	30	28														
2,2 4	100 112	3 5,5	ND65C		53	57,5	28	8	31,3																				ND65H**	65	42	18	25,4	50	48	45	42	40	38	35	32	30
2,2 - 4	100 - 112	3 - 5,5	ND86A	86	66	60	28	8	31,3	R82	20	31,5	24	NS86P**	86	48	15	25,4	27	25	22	20																				
5,5 - 9	132	7,5 - 12,5	ND86B		73	88	38	10	41,3														NS86H**	86	55	18	32	48	45	42	40	38	35	32	30	28	25					
11 15	160	15 20	ND108A		73	77	38	10	41,3																													R103	24	42	32	NS108P**
18,5 22	180	25 30	ND108B	84	110	42	12	45,3	NS108Q**	108	18	35	42	40																												
30	200	40	ND108C	100	110	48	14	51,8							NS108H**	108	18	38	48	45	42	40	38	35	32	30	28	25														
			ND108D	100	110	55	16	59,3																					NS108K**	108	31,75	40	70	68	65	62	60					
37 45	225	50 60	ND143B	143	106	110	55	16	59,3	R132	29	64	50	NS143P**	143	75	-	50	52	50	48	45	42	40	38	36																
55	250	75	ND143D		137	140	65	18	69,4																																	
75 90	280	100 125	ND143E		137	140	75	20	79,9																																	

Accouplement usiné Type "ND"

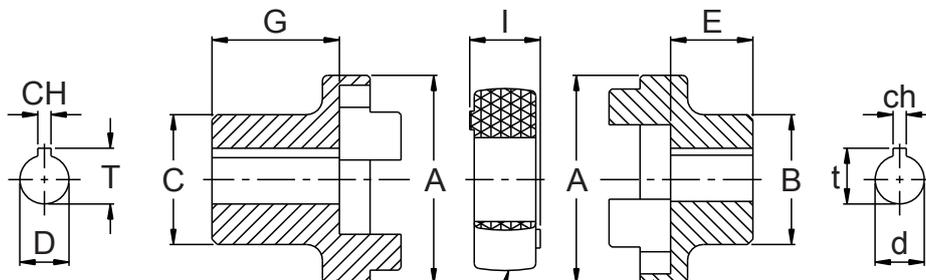


Tableau 2

Accouplements bruts non usinés

Référence	Dimensions (mm)			
	A	C	D Maxi	E
NS48C	48	38	20	54
NS65C	65	53	28	57,5
NS65P		34	18	21,5
NS86A		55	29	60
NS86B	86	73	38	88
NS86P		48	25	27
NS108A	108	73	45	77
NS108C		100	50	110
NS108Q		64	33	42
NS143A	143	106	50	94
NS143C		137	75	140

Tableau 3

Accouplements bruts usinés

Référence	Dimensions (mm)			Valeurs possibles de E (en millimètres)															
	A	C	D Maxi	E Maxi	1	2	3	4	5	6	7	8	9	10	11	12	13	14	
NS48C***	48	38	20	54	52	50	48	45	42	40	38	35	32	30	28	25	22	20	
NS65C***	65	53	28	57,5	55	52	50	48	45	42	40	38	35	32	30	28	25		
NS65P***		34	18	21,5	20														
NS86A***		55	29	60	58	55	52	50	48	45	42	40	35	30					
NS86B***	86	73	38	88	85	82	80	78	75	72	70	65	60	58	55	52	50	48	
NS86P***		48	25	27	24														
NS108A***		73	45	77	75	72	70	68	65	62	60	55	50						
NS108C***	108	100	50	110	108	105	100	98	95	92	90	85	80	75					
NS108Q***		64	33	42															
NS143A***		143	106	50	94	90	88	85	80	78	75	70	68	65	60	58	56		
NS143C***	137		75	140	140	135	130	125	120	115	110	105	100	98					