




| Code de commande     | Hauteur d'axe | Dimensions en mm |     |     |    |    |     |    |    |    |      |      |     |
|----------------------|---------------|------------------|-----|-----|----|----|-----|----|----|----|------|------|-----|
|                      |               | A                | B   | C   | D  | d  | E   | F  | G  | H  | I    | L    | M   |
| <b>149.BMA.W1950</b> | 71            | 198              | 156 | 90  | 20 | 14 | M6  | 12 | 8  | 40 | 21   | 26,5 | 53  |
| <b>149.BMA.W1951</b> | 80            | 198              | 156 | 100 | 20 | 14 | M8  | 12 | 8  | 40 | 22   | 26,5 | 53  |
| <b>149.BMA.W1952</b> | 90S           | 198              | 156 | 100 | 20 | 14 | M8  | 12 | 8  | 40 | 24,5 | 26,5 | 53  |
| <b>149.BMA.W1953</b> | 90L           | 244              | 205 | 125 | 20 | 14 | M8  | 12 | 8  | 40 | 24   | 26,5 | 53  |
| <b>149.BMA.W1954</b> | 100L          | 244              | 205 | 140 | 20 | 14 | M10 | 12 | 8  | 40 | 24   | 26,5 | 53  |
| <b>149.BMA.W1955</b> | 112M          | 244              | 205 | 140 | 20 | 14 | M10 | 12 | 8  | 40 | 20   | 26,5 | 53  |
| <b>149.BMA.W1956</b> | 132S          | 288              | 245 | 140 | 20 | 14 | M10 | 12 | 8  | 45 | 20   | 26,5 | 53  |
| <b>149.BMA.W1957</b> | 132M          | 288              | 245 | 178 | 20 | 14 | M10 | 12 | 8  | 45 | 20   | 26,5 | 53  |
| <b>149.BMA.W1958</b> | 160M          | 343              | 300 | 210 | 26 | 18 | M12 | 15 | 15 | 60 | 28   | 36,5 | 73  |
| <b>149.BMA.W1959</b> | 160L          | 419              | 370 | 254 | 26 | 18 | M12 | 15 | 15 | 60 | 28   | 36,5 | 73  |
| <b>149.BMA.W1960</b> | 180M          | 419              | 370 | 241 | 26 | 18 | M12 | 15 | 15 | 60 | 35   | 36,5 | 73  |
| <b>149.BMA.W1961</b> | 180L          | 446              | 400 | 279 | 26 | 18 | M12 | 15 | 15 | 60 | 35   | 36,5 | 73  |
| <b>149.BMA.W1962</b> | 200L          | 500              | 430 | 305 | 33 | 22 | M16 | 15 | 15 | 60 | 35   | 36,5 | 73  |
| <b>149.BMA.W1963</b> | 225S          | 500              | 430 | 286 | 33 | 22 | M16 | 15 | 15 | 60 | 35   | 36,5 | 73  |
| <b>149.BMA.W1964</b> | 225M          | 500              | 445 | 311 | 33 | 22 | M16 | 15 | 15 | 60 | 35   | 36,5 | 73  |
| <b>149.BMA.W1965</b> | 250M          | 500              | 445 | 349 | 33 | 22 | M20 | 15 | 15 | 60 | 50   | 51,5 | 103 |
| <b>149.BMA.W1966</b> | 280S          | 618              | 570 | 368 | 33 | 22 | M20 | 15 | 15 | 60 | 50   | 51,5 | 103 |
| <b>149.BMA.W1967</b> | 280M          | 618              | 570 | 419 | 33 | 22 | M20 | 15 | 15 | 60 | 50   | 51,5 | 103 |

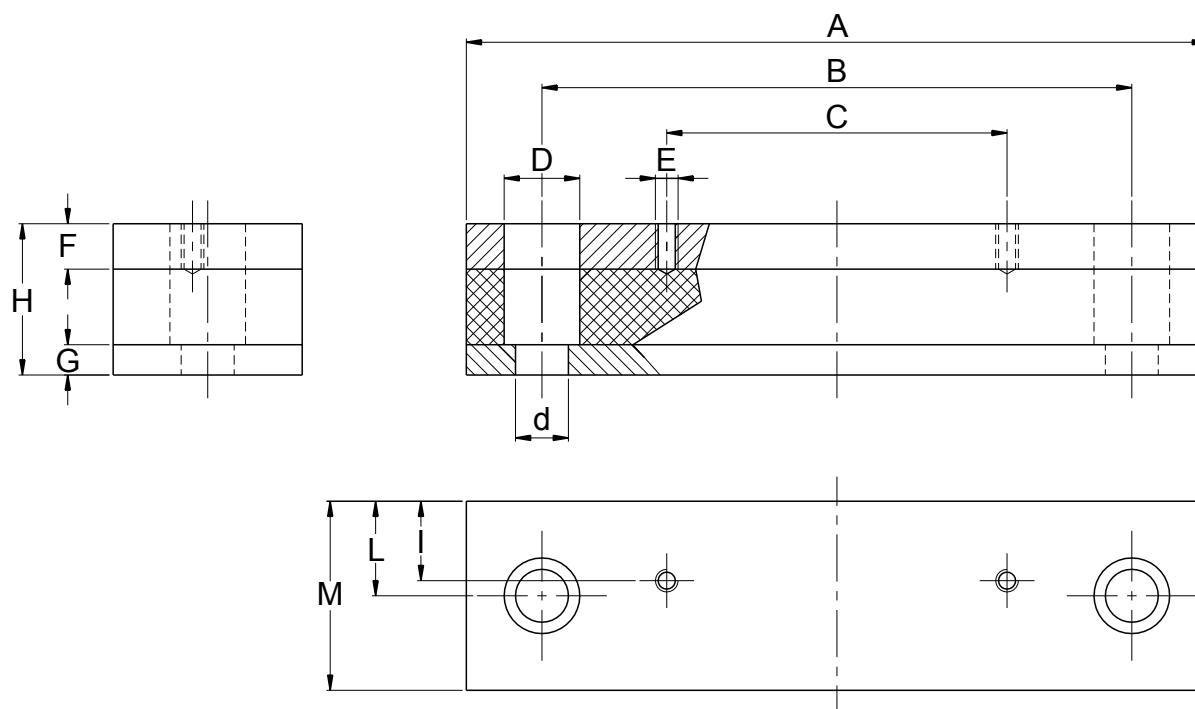

Spécifications :  
 Matière : Acier et gomme vulcanisée (70 shore)