





Coupe A-A

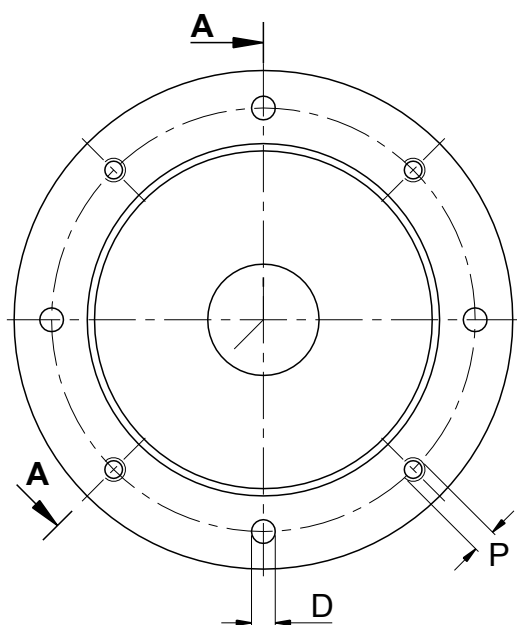


Exemple de commande : TH4-100B-CNOMO

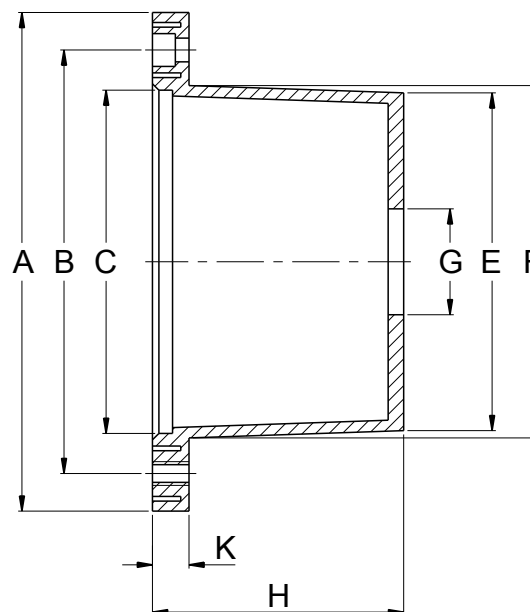


Codes d'usinage, voir page 97

Perçage et grille de regard
CNOMO sur demande

Puissance moteur 4 pôles 1450 tr/min			Dimensions en millimètre												
Kw	Taille	HP	Référence	A	B	C	D	NbxD	E	F	G	H	K	P	NbxD
0,55	80	0,75	TH20A	200	165	130	12	4	130	137	45	95	16	M10	4
-	-	-	THB20								50	113			
1,5	90	2	TH1								63	126			
2,2	100	3	THB25	250	215	180	14	4	176	186	50	112	21	M12	4
4	112	5,5	TH2								63	136			
5,5	132	7,5	THB30	300	265	230	14	4	230	235	80	130	21	M12	4
9		12,5	TH3									170			
11	160	15	TH4	350	300	250	18	4	240	253	80	195	25	M16	4
22	180	30													
30	200	40	TH15	400	350	300	18	4	235	295	100	206	25	M16	4
37	225	50	TH18	450	400	350	18	8	260	350	100	280	25	M16	8
45		60													
55	250	75	TH19	550	500	450	18	8	300	450	100	290	30	M16	8
90	280	125													
110	315S	150	TH20	660	600	550	22	8	300	550	100	295	35	M20	8

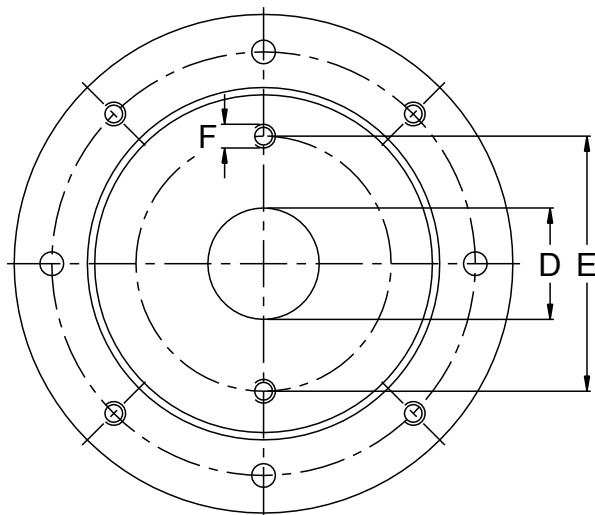

**Configuration
Flasque 2 trous**

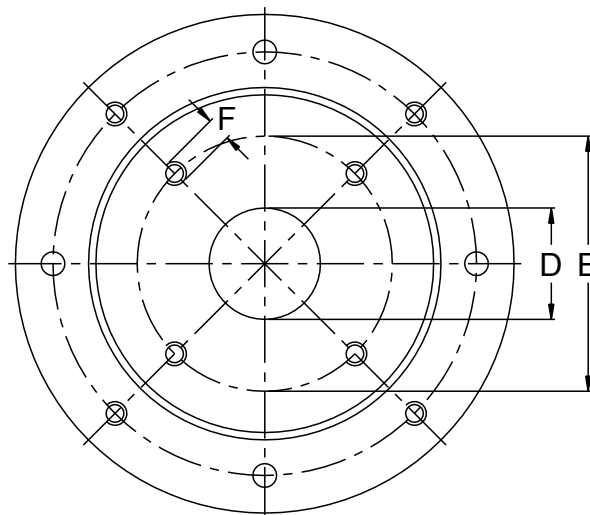

**Configuration
Flasque 2 trous**

Code d'usinage	Dimensions (mm)			Nombre de trous F
	D	E	F	
45 A	45	85	Ø9	4
453 A	45,3	72	M8	4
50	50	60	M5	4
		63	M6	4
		63	Ø7	4
		115	M10	2
508	50,8	82,55	M8	2
		82,55	M8	4
		82,55	M10	2
52	52	92	Ø9	2
		82	Ø9	4
60	60	74	Ø9	2
		75	M6	4
		112	M12	2
		104	M10	2
		74	Ø9	4
63	63	80	M8	2
		80	Ø9	4
		100	M8	2
		125	M6	4
		160	M8	4
		80	M10	2
		100	M8	4
		80	M8	4
		85	M8	4
		80	Ø10	4
		80	M10	4
		106	M10	2
65 A	65	90	M8	4
70 A	70	84	M6	4
80	80	100	M8	4
		100	Ø9	4
		100	Ø11	4
		106	M10	2
		109	M10	2
		130	M8	4
		100	M10	2
		100	M10	4
		110	M10	2
		115	M10	2
		103	M8	4
		112	M10	2
		113	M12	4
		100	M12	4

Code d'usinage	Dimensions (mm)			Nombre de trous F
	D	E	F	
825	82,55	106	M10	2
		162	M10	4
		100	Ø10,5	4
		106	Ø10,5	4
90	90	112	M8	2
		100	M6	4
92	92	140	M8	4
		145	M10	4
95	95	120	M8	4
		120	Ø9	4
952	95,2	127	M10	4
		127	Ø11	4
985	98,5	125	Ø11	4
		125	M10	4
		125	M12	4
		125	M10	4
100	100	125	M10	4
		125	Ø11	4
		125	Ø14	4
		140	M12	2
		146	M12	2
		125	M12	2
		126	M10	2
		126	M12	2
		140	M10	2
		160	M10	4
		190	Ø16	4
		126	M8	4
101	101,6	146	M12	2
		127	M12	4
		145	M14	2
		146	M10	2
		146	M14	2
		142	Ø13	4
		127	M12	2
		146	M12	4
		130	M8	4
		175	M10	4
110	110	205	Ø15	4
		130	M10	4
		145	M12	4
		145	M12	4
		145	M12	4

Code d'usinage	Dimensions (mm)			Nombre de trous F
	D	E	F	
112	112	140	M12	4
		140	M10	2
		140	M12	2
115	115	180	M12	4
		100	Ø11	4
116 A	160	160	M14	2
120	120	145	M10	4
		210	M16	4
		210	M16	2
125	125	160	M12	4
		160	Ø14	4
		180	M16	2
		155	M10	4
		160	M12	2
		160	Ø18	4
		200	M12	4
		170	Ø18	4
		180	Ø20	4
		160	M14	4
		200	M16	4
		160	M10	4
127	127	181	M16	2
		162	M12	4
		162	M14	4
		200	M16	4
		146	M12	2
		181	M14	2
		162	M14	2
		181	M14	4
130	130	150	M12	4
		165	M14	4
		165	M10	4
		150	M10	4
135	135	160	M10	4
		180	M12	4
140	140	165	M10	4
		180	M12	2
		200	M16	4
		120	Ø11	4
		180	M14	4
		165	M8	4
		180	M16	2
		180	M16	2

Code d'usinage		Dimensions (mm)			Nombre de trous F
		D	E	F	
145	A		200	M12	4
150	A	150	175	M12	4
	B		185	M12	4
	C		185	M16	4
152	A	152,4	217,5	Ø17	4
	B		228	M18	2
	C		228	M18	4
	D		228	M20	2
	E		228	M20	4
	F		228	M16	4
155	A	155	190	M12	4
160	A	160	200	M16	4
	B		200	Ø18	4
	C		224	M20	2
	D		185	M10	4
	E		200	M16	2
	F		224	M16	4
	G		230	M16	4
	H		230	Ø22	4
	I		180	Ø14	4
	L		200	M18	4
	M		200	M12	4
165	A	165,1	317,5	M18	4
	B		317,5	M20	4
	C		317,5	M24	2
	D		229	M20	4
175	A	175	200	M10	4
	B		200	M12	4
	C		230	M20	2
	D		225	M20	4
180	A	180	216	M16	4
	B		224	M16	4
200	A	200	230	M12	4
	B		250	M20	4
	C		250	Ø20	4
	D		250	Ø22	4
	E		280	Ø24	2
	F		280	M24	2
205	A	205	240	M16	4
220	A	220	260	M16	4
224	A	224	280	M20	4