


LANTERNES																				Anneau de centrage	Accouplement élastique complet	
Puissance moteur		Diamètre arbre moteur ép. Clavette	Type de pompe	Lanterne	Dimensions en millimètre															Code	Code	
Kw	HP				A	B	C	D	F	H	K	P	Q	R	S	E	L	M	N			O
2,2 3	4 5,5	Ø18 Cl. 5	U1P	LMH151	110	92	41,3	9	78	101	12	3	90	70	34	25,4	26,2	72	52	M6	RC05-254	ND500
			1C	LMH152												30	24,5	73	56		RC05-30	ND501
			1M	LMH152																		
		Ø19,05 Cl. 4,6	U1P	LMH151												25,4	26,2	72	52		RC05-254	ND510
			1C	LMH152												30	24,5	73	56		RC05-30	ND511
			1M	LMH152																		ND512
5 7	13,5 18	Ø25 Cl. 7	U1P	LMH401	146	127	110	9	110	134	12	3	118	91	43,5	25,4	26,2	72	52	M6	RC1-254	ND600
			1C	LMH402												30	24,5	73	56		RC1-30	ND601
			1M	LMH403																		ND602
			2	LMH403												36,5	32,5	96	71,5	M8	RC1-365	ND603
			ZF	LMH404												80	34,5	100	72		-	ND605
			U1P	LMH401												25,4	26,2	72	52		RC1-254	ND610
		Ø25,4 Cl. 6,35	1C	LMH402												30	24,5	73	56	M6	RC1-30	ND611
			1M	LMH402																		ND612
			2	LMH403												36,5	32,5	96	71,5	M8	RC1-365	ND613
			ZF	LMH404												80	34,5	100	72		-	ND615

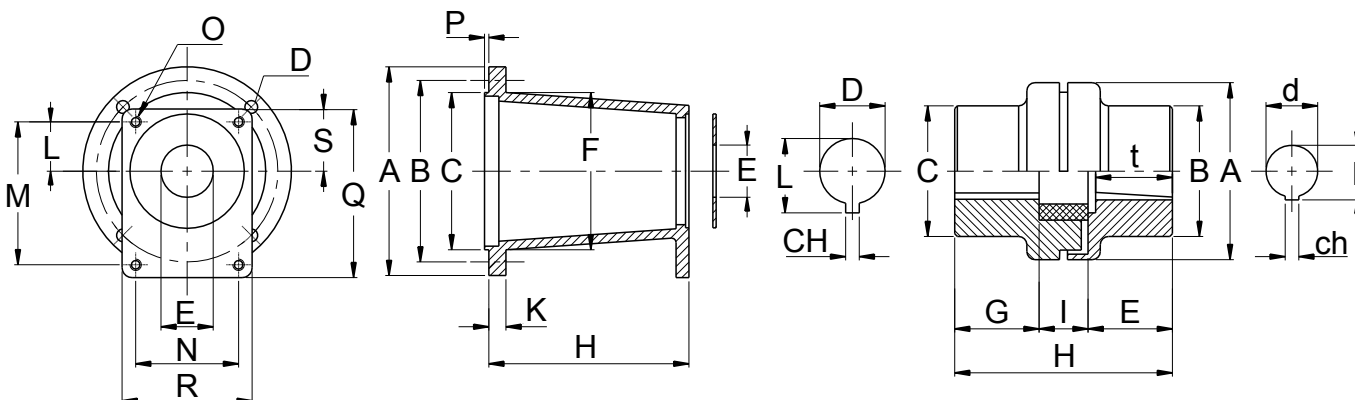

ACCOUPLEMENTS ELASTIQUES																			
Accouplement complet		Demi accouplement côté moteur	Dimensions en millimètre						Roue élastique		Demi accouplement côté pompe		Dimensions en millimètre						
Code	H	Code	A	C	G	D	CH	L	Code	I	Code	B	E	Arbre	p	ch	I	t	
ND500	87	ND48MC16	48	33	54	18	5	26,3	R42	16	ND48PU1P	30	17	Cônique 1:8	9,7	2,4	10,5	15	
ND501											ND48P1C			Cylindrique	12	3	13,3	13,5	
ND502											ND48P1M			Cônique 1:8	13,9	3	15,5	18,5	
ND510		ND48CC22				ND48PU1P	Cônique 1:8	9,7			2,4			10,5	15				
ND511						ND48P1C	Cylindrique	12			3			13,3	13,5				
ND512						ND48P1M	Cônique 1:8	13,9			3			15,5	18,5				
ND600	106	ND65MC33	65	53	66,5	25	7	28,3	R62	18	ND65PU1P	34	21,5	Cônique 1:8	9,7	2,4	10,5	15	
ND601											ND65P1C			Cylindrique	12	3	15,5	18,5	
ND602											ND65P1M			Cônique 1:8	13,9	3	15,5	18,5	
ND603		ND65P2				Cônique 1:8	17,2	3,2 4			18,5			23					
ND605		ND65PZF				Cônique 1:8	16,9	3			17,7			19					
ND610		ND65MC35				ND65PU1P	Cônique 1:8	9,7			2,4			10,5	15				
ND611						ND65P1C	Cylindrique	12			3			15,5	18,5				
ND612						ND65P1M	Cônique 1:8	13,9			3			15,5	18,5				
ND613						ND65P2	Cônique 1:8	17,2			3,2 4			18,5	23				
ND615						ND65PZF	Cônique 1:5	16,9			3			17,7	19				